


NLS-HR5280-BT

Wireless 2D Barcode Scanner

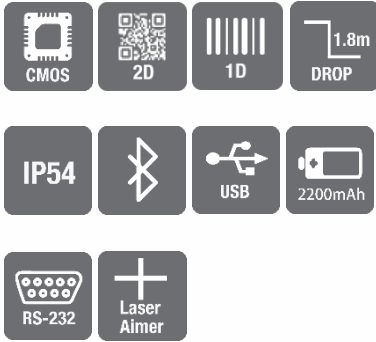

Features

■ Outstanding Performance

Equipped with an outstanding CPU, this CPU-based scanner can effortlessly capture high-density, high volume and distorted barcodes printed on paper or displayed on screen.

■ Reliable and Stable Wireless Communication

Adopting the latest Bluetooth which is strong anti-interference and stable to transmit the data.

■ Durable Construction

The scanner is built into an IP54-sealed and drop resistant (1.8m) housing without moving parts and fortifies itself.

■ Powerful Data Editing Function

The NLS-HR5280-BT allows to customize decoding mode flexibly through preset.

■ Low Consumption and Great Compatibility

The low consumption of NLS-HR5280-BT reduces connection issues and maximizes the compatibility for diverse applications.

Application Scenarios

Retail chains, inventory management, warehouse and logistics, express delivery services and supermarket, food traceability, electricity meter reading, asset counting, healthcare, etc.

Wireless 2D Barcode Scanner

Performance	Image Sensor	1280×800 CMOS		
	Illumination	White LED		
	Aiming	650nm laser diode		
	Symbologies	2D	PDF417, Micro PDF 417, QR Code, Micro QR Code, Data Matrix, Aztec, Maxicode, Chinese Sensible Code, GM Code, Code One.	
		Postal	USPS Postnet, USPS Intelligent Mail, Royal Mail, KIX Post, Australian Postal.	
		1D	EAN-13, EAN-8, UPC-A, UPC-E, Coupon, Febraban, ISSN, ISBN, Codabar, Code 128, Code93, ITF-6, ITF-14, China Post 25, Interleaved 2 of 5, Industrial 25, Standard 25, Matrix 25, GS1 Databar(RSS), GS1-128 (UCC/EAN-128), GS1 Composite(EAN UCC Composite), Code 39, Code 11, MSI-Plessey, Plessey, AIM 128, ISBT 128, Code 49, Code 16K.	
	Resolution*	≥3mil		
	Typical Depth of Field*	EAN-13 (13mil)	50mm-555mm	
		Code 39 (5mil)	110mm-240mm	
		PDF 417 (6.7mil)	90mm-210mm	
Data Matrix (10mil)		90mm-190mm		
QR Code (15mil)		40mm-360mm		
Scan Angle**	Pitch	±55°		
	Skew	±55°		
	Tilt	360°		
Field of View	Horizontal 42°, Vertical 28°			
Min. Symbol Contrast	20%			
Wireless	Communication Mode	Synchronous, asynchronous and batch mode		
	Radio Technology	Bluetooth 5.0		
	Communication Distance	50m (direct line of sight in open air)		
	Memory Capacity	≥15000 pieces of Code 128 (20 byte of each Code 128)		
	Battery	2200 mAh lithium-ion battery		
	Expected Charge Time	≤4 hours (with power adapter)		
	Expected Battery Life	≥12 hours of continuous operation (scan once per 6 seconds)		
Mechanical/ Electrical	Interfaces	RS-232, USB		
	Dimensions (L×W×H)	Scanner: 172.5×77.5×95.5mm Cradle: 194.0×90.5×68mm		
	Weight	Scanner: 227g		
	Notification	Beep, LED indicator, vibration		
	Operating Voltage	5VDC±5%		

Newland Headquarter

Add: No.1 Rujiaq West Rd.,
Mawei, Fuzhou, Fujian 35001, China
Tel: +86 591 8397 9500
Email: info@nlscan.com
Web: www.newlandaidc.com

Newland APAC

Taiwan Tel: +886 2 7731 5388
Taiwan Email: info@newland-id.com.tw
Web: www.newland-id.com.tw
Japan Tel: +886 2 7731 5388 ext. 71
Korea Tel: +82 10 8990 4838
India Tel: +91 120 7964266
Japan/Korea/India Email: info@nlscan.com
Web: www.newlandaidc.com

Newland NALA

North America Tel: +1 510 490 3888
North America Email: info@nlscan.com
Latin America Tel: +1 239 598 0068
Latin America Email: info@newlandla.com
Web: www.newlandamerica.com

Newland EMEA

Tel: +31 (0) 345 87 00 33
Email: sales@newland-id.com
Tech Support: tech-support@newland-id.com
Web: www.newland-id.com



NLS-HR5280-BT

SCANNING MADE SIMPLE

Wireless 2D Barcode Scanner

Environmental	Operating Temperature	-20°C to 50°C (-4°F to 122°F)
	Storage Temperature	-40°C to 70°C (-40°F to 158°F)
	Battery Charge Temperature	0°C to 45°C (32°F to 113°F)
	Humidity	5% ~ 95% (non-condensing)
Environmental	ESD	±15 KV (air discharge); ±8 KV (contact discharge)
	Drop	Scanner: 1.8m Cradle: 1m
	Sealing	Scanner: IP54
Certifications		FCC Part15 Class B, CE EMC Class B

*Test conditions: T=23°C; Illumination=300lux using incandescent lamp; sample barcodes made by Newland.

**Test conditions: Scan Distance= (min. DOF + max. DOF)/2; T=23°C; Illumination=300lux using incandescent lamp;
2D: QR Code; 10 Bytes; Resolution=15mil; PCS=0.8.

Specification are subject to change without notice

Version:V1.3 2020/07/04

Newland Headquarter

Add: No.1 Rujiaq West Rd.,
Mawei, Fuzhou, Fujian 35001, China
Tel: +86 591 8397 9500
Email: info@nlscan.com
Web: www.newlandaidc.com

Newland APAC

Taiwan Tel: +886 2 7731 5388
Taiwan Email: info@newland-id.com.tw
Web: www.newland-id.com.tw
Japan Tel: +886 2 7731 5388 ext. 71
Korea Tel: +82 10 8990 4838
India Tel: +91 120 7964266
Japan/Korea/India Email: info@nlscan.com
Web: www.newlandaidc.com

Newland NALA

North America Tel: +1 510 490 3888
North America Email: info@nlscan.com
Latin America Tel: +1 239 598 0068
Latin America Email: info@newlandla.com
Web: www.newlandamerica.com

Newland EMEA

Tel: +31 (0) 345 87 00 33
Email: sales@newland-id.com
Tech Support: tech-support@newland-id.com
Web: www.newland-id.com

